

# XAS GLASSWARE DRYERS



The XAS range is used to dry and store glassware by injecting air into the working volume at an adjustable temperature up to 60°C. They are functional, easy-to-use and -to-clean, and energy efficient.

## As beautiful as effective.

The inner and outer casings are made of steel sheets coated with epoxy paints. Durability. Control panel on top.

## An easy-to-use temperature control.

C3000 PID electronic controller. Measurement by PT100 probe. Functions : delayed start, end cycle timer, repeat loop.



### Double door.

2 security glasses. Shockproof.

### Stainless steel shelves.

2 shelves delivered with XAS320.

3 shelves delivered with XAS800.


Multiple levels of loading. Perforated for better circulation of warm air.

### Exclusive ventilation system !

Air is sucked by fan engines located in the top part of the oven. It is heated then blown out by the back bottom part.

This air recycling and a permanent air change allow an excellent drying of your glassware.

The moist air escape through an opening at the top of the cabinet.

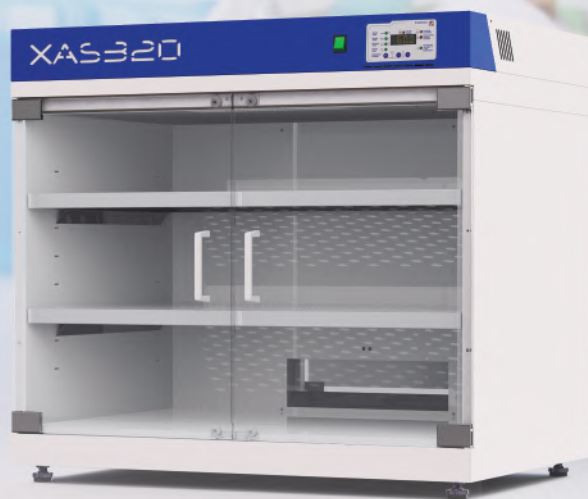

### Swivel castors with integred foot.

Easy to move. Height-adjustable feet to stabilize and level the cabinet.

### Fixed feet.

Height adjustable.

[www.france-etuves.com](http://www.france-etuves.com)

# XAS RANGE


## GLASSWARE DRYING CABINETS

## TECHNICAL DATA



|   | XAS320                | XAS800 |
|---|-----------------------|--------|
| <b>SIZES</b>                            |                       |        |
| Working volume (L)                      | 320                   | 800    |
| Internal width (mm)                     | 900                   | 900    |
| Internal depth (mm)                     | 600                   | 600    |
| Internal height (mm)                    | 600                   | 1480   |
| External width (mm)                     | 946                   | 943    |
| External depth (mm)                     | 736                   | 745    |
| External height (mm)                    | 883                   | 1828   |
| Weight, empty (kg)                      | 92                    | 115    |
| Number of door(s)                       | 2                     | 2      |
| <b>PERFORMANCES</b>                     |                       |        |
| Temperature range (°C)                  | up to 60°C            |        |
| <b>ELECTRICAL DATA</b>                  |                       |        |
| Heating power (W)                       | 2000                  | 2000   |
| Power                                   | 230V ~1P 50/60Hz, 16A |        |
| <b>LOADING SHELVES</b>                  |                       |        |
| Maximum number                          | 6                     | 12     |
| Maximum distributed load per shelf (kg) | 30                    | 30     |
| Maximum load in the cabinet (kg)        | 60                    | 120    |

## ACCESSORIES

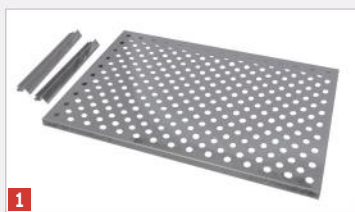

1 Shelf with guide bars

**1 Shelf with guide bars**

Stainless steel. Perforated. Maximum distributed load : 30 kg.

**2 Subframe with casters (for XAS320)**

Elevates the cabinet for a easier loading.  
Swivel castors with brakes.  
Shelf surcharge.



2 Subframe with castors



Order a few click...  
[store.france-etuves.com](http://store.france-etuves.com)

Web, mobile, tablet, order easily  
and receive your products quickly !

[store.france-etuves.com](http://store.france-etuves.com)



**FRANCE ETUVES**  
Ovens Designer & Manufacturer

65/67 rue Auguste Meunier 77500 Chelles, FRANCE

T : +33 1 64 21 30 60 / F : +33 1 64 21 30 86